



09-16-04

1744

HDP/SB/21 based on PTO/SB/21 (08-00)

Bry/B

Please type a plus sign (+) inside this box → ☐**TRANSMITTAL
FORM**

(to be used for all correspondence after initial filing)

TRANSMITTAL FORM (to be used for all correspondence after initial filing)	Application Number	10/091,374	
	Filing Date	3/4/02	
	First Named Inventor	Bone	
	Group Art Unit	1744	
	Examiner Name	Snider	
Total Number of Pages in This Submission		Attorney Docket Number	0275R-000575

ENCLOSURES (check all that apply)

<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input checked="" type="checkbox"/> Amendment / Response <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Response to Missing Parts/ Incomplete Application <input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Assignment Papers (for an Application) <input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s) _____	<input type="checkbox"/> After Allowance Communication to Group <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): return receipt postcard
Remarks		The Commissioner is hereby authorized to charge any additional fees that may be required under 37 CFR 1.16 or 1.17 to Deposit Account No. 02-2548. A duplicate copy of this sheet is enclosed.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT

Firm or Individual name	Harness, Dickey & Pierce, P.L.C.	Attorney Name	Mark D. Elchuk	Reg. No.	33,686
Signature					
Date	September 15, 2004				

CERTIFICATE OF MAILING/TRANSMISSION

I hereby certify that this correspondence is being deposited with the United States Postal Service as express mail in an envelope addressed to: Director of the U.S. Patent and Trademark Office, P.O. Box 1450, Alexandria, VA 22313-1450, or facsimile transmitted to the U.S. Patent and Trademark Office on the date indicated below.			
Typed or printed name	Mark D. Elchuk	Express Mail Label No.	EV 531 989 915 US
Signature		Date	September 15, 2004

EV 531 989 915 US



THIS PAGE BLANK (USPTO)



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No.: 10/091,374
Filing Date: 03/04/2002
Applicant: Daniel Bone
Group Art Unit: 1744
Examiner: Theresa T. Snider
Title: LOCKING MECHANISM FOR DUST COLLECTION
MODULE OF VACUUM CLEANER
Attorney Docket: 0275R-000575

Director of The United States Patent and Trademark Office
P.O. Box 1450
Alexandria, Virginia 22313-1450

AMENDMENT

Sir:

The undersigned is submitting a certified priority document for the above referenced application. This application received a Notice of Allow ability that was mailed on August 19, 2004. On or about Sept. 9, 2004 the undersigned became aware that the certified priority document, from the application from which the present application claims priority, had not yet been submitted to the Office. The undersigned, that day, contacted the Office and spoke with SPE Robert J. Warden to verify that the priority document could still be submitted. The undersigned was advised to submit the priority document together with a letter explaining the present circumstances.



THIS PAGE BLANK (USPTO)

Accordingly, a certified priority document for the present application is being submitted herewith. If there are any questions, the undersigned should be contacted at (248) 641-1600.

Respectfully submitted,

Dated: September 15, 2004

By: 
Mark D. Elchuk, Reg. No. 33,686

HARNESS, DICKEY & PIERCE, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600
MDE/jo

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Ansower

Dated 10 September 2004

CERTIFIED COPY OF PRIORITY DOCUMENT

THIS PAGE BLANK (USPTO)

The
**Patent
Office**

06 JUL 2001


1/77

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



06 JUL 2001

06JUL01 6643435-1 100223
P01/7700 0.00-0116588.5

1. Your reference

2. Patent application number
(The Patent Office will fill in this part)

0116588.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

**BLACK & DECKER INC
DRUMMOND PLAZA
1423 KIRKWOOD HIGHWAY
NEWARK, DELAWARE, YSA**

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE, USA

341214003

4. Title of the invention

LOCKING MECHANISM FOR DUST COLLECTION MODULE OF VACUUM CLEANER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

**BELL I S, DLUGOSZ AC, HARRIES SG, SHAYA D M
REGAN-ADDIS H,
BLACK & DECKER
PATENT DEPARTMENT
210 BATH ROD
SLOUGH
SL1 3YD
United Kingdom**

7570971001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 18

Claim(s) 5

Abstract

Drawing(s) 8

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) YES

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application

Signature

Date: 06 July 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

SIMON HARRIES

01753 500548

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Statement of inventorship and of
right to grant of a patent

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference
P-UK-HW1030
2. Patent application number
(if you know it)
GB 0116588.5
3. Full name of the or of each applicant
BLACK & DECKER INC.
4. Title of the invention
LOCKING MECHANISM FOR DUST COLLECTION
MODULE OF VACUUM CLEANER
5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent
By virtue of employment and in accordance with Section 39
of the Patents Act 1977.
6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))
NONE
7.
I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.
Signature I S Bell Date: 13 August 2001
8. Name and daytime telephone number of
person to contact in the United Kingdom
IAN S. BELL 01753 500788

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

DANIEL BONE
5 BLACK ROAD
LANGLEY MOOR
CO. DURHAM
DH7 8LW

43867001

Patents ADP number *(if you know it)*:

Patents ADP number *(if you know it)*:

Patents ADP number *(if you know it)*:

Reminder

Have you signed the form?

Patents Form 7/77

LOCKING MECHANISM FOR DUST COLLECTION MODULE OF VACUUM CLEANER

This invention relates to a locking mechanism suitable for detachably securing a dust collection module to a vacuum cleaner housing.

Removable dust collection modules contained within vacuum cleaners are known. For example EP-A-9783865 (Application number 97300134.0-2316, Black and Decker Inc) describes a known bagless vacuum cleaner comprising a floor travelling head comprising a housing member that incorporates a removable dust collection bowl in a hole in the housing towards the front of the floor travelling head. The dust collection module includes an integral handle moulded therein on its upper surface, for use in removing the dust collection module. A floor nozzle leads through a single front inlet of the dust collection module and air and entrained dust, dirt and debris enters through this inlet into the dust collection module and exits through a back filter-covered face of the module. The large area of the dust collection module causes air velocity in the receiving area to be smaller than at the inlet, allowing the entrained dirt, dust and debris to fall into the dust collection module. The module therefore needs to be emptied regularly by the user, and removal is effected by lifting the module upwards out of the housing using the integrally moulded handle. Notches are provided in the side walls of the dust collection module which interact with cantilevered snap-lock latches located in the side walls of the hole of the housing in which the dust collection module sits. The latches retain the dust collection module in the hole in the housing but can deflect outward when sufficient upward force is exerted on the handle at the top of the dust collection unit. They therefore allow the dust collection module to be removed for emptying, but prevent the dust collection module slipping out of the housing during normal use or storage.

25

We have found that for some applications it may be desirable to have a latch mechanism that can provide more positive locking of the dust collection module in a vacuum cleaner housing than is provided by the notches and snap-lock latches of EP-A-0783865 (Application number 97300134.0-2316, Black and Decker Inc). We have

also found that while this more positive locking mechanism may be desirable for any normal vacuum operation since it ensures that the dust collection module is released only for emptying, it is especially advantageous to provide the more positive locking arrangement on the dust collection module at times when another part is being moved relative to the dust collection module, since this relative movement could otherwise cause accidental removal of the dust collection module.

A first aspect of the present invention provides a locking mechanism for detachably securing a removable dust collection module to a vacuum cleaner housing comprising:

- (i) a latch member that can move from a first position in which, in use, it can engage part of the vacuum cleaner housing to a second position in which, in use, it is free from the vacuum cleaner housing; and
- (ii) a release member that is movable relative to the latch member, the movement causing the latch member to move from its first to second position.

The invention also provides a kit of parts comprising the said locking mechanism in combination with a removable dust collection module of a vacuum cleaner, the latch member being retained to the dust collection module so that movement of the latch member relative to the dust collection module in at least one direction is restricted, and preferably substantially prevented.

The removable dust collection module and locking mechanism combination are preferably provided contained within part of a vacuum cleaner housing, and another aspect of the invention provides a vacuum cleaner housing containing the dust collection module and locking mechanism combination. The dust collection module is preferably removable by extraction from the vacuum cleaner housing in the said first direction, and the restricted direction of movement of the latch member relative to the dust collection module is preferably also in the said first direction.

Since the movement of the latch member in one direction relative to the dust collection module is restricted (and preferably substantially prevented), and in a first

position the latch member can engage part of the vacuum cleaner housing, this means that in the first position of the latch member, if a force is exerted onto the dust collection in the said first direction then movement of the dust collection module itself relative to the housing in this first direction is restricted, and preferably substantially prevented. Thus the latch is effectively fixed to the dust collection module, and can hold or release the dust collection module from the housing part of the vacuum cleaner when a force is exerted in the said first direction.

Preferably the latch mechanism can move in one direction, or in opposed directions along a common line, in order to engage part of the vacuum cleaner housing. Movement of the latch member in all other directions is preferably restricted, especially preferably substantially prevented.

In the vacuum cleaner containing the dust collection module and locking mechanism kit of parts, the dust collection module is removed by lifting it up through an upper surface of the vacuum cleaner housing. Preferably the said first direction in which movement of the latch member relative to the dust collection module is restricted is the said upward lifting direction of the dust collection module. However sideways or other direction removable dust collection modules are also envisaged, and in these cases the said first direction is preferably the same said sideways or other direction.

The latch member is preferably an elongate member, and preferably comprises a resilient biasing portion, especially a spring, preferably separating two end housing-engagement portions. The end housing-engagement portions are preferably also elongate members, and are preferably mirror images of each other.

The movement of the release member is preferably in a direction substantially perpendicular to the elongate latch member, and the release member is preferably movable relative to the latch member to provide a force against the biasing force provided by the biasing portion of the latch member. Preferably the release member is moveable from a first release-member-position in which it is in contact with the latch

member, to a second release-member-position in which it is not in contact the latch member.

Thus for example when the release member contacts the latch member and exerts a force that acts against the biasing force of the spring or other biasing portion of the latch member, the housing engagement portions come closer, and when the release member loses contact with the latch member, the biasing force of the biasing portion of the latch member causes the housing-engagement portions of the latch member to move away from each other, i.e. the latch member shortens when contacted by the release member and lengthens when not contacted by the release member. Arrangements in which the converse applies, i.e. the latch lengthens when contacted by the release member and shortens when not contacted by the release member are also envisaged.

Preferably the release member is movable relative to the latch member such that when the release member is in the said first release-member-position where it is in contact with the latch member then the latch member is in its second position in which it is free from the housing part. However an arrangement in which the converse is true is also envisaged, i.e. when the release member is in contact with the latch member then the latch member can engage the housing part.

Preferably the release member is provided with at least one cam surface, and most preferably the latch member is provided with a corresponding cam surface, and the cam surfaces can slide over each other to effect the said movement of the latch member from its first to second position.

In one embodiment the release member comprises two cam surfaces, and the latch member comprises two end, housing-engagement portions, each of which is provided with a cam surface shaped to correspond with respective ones of the cam surfaces on the release member.

Preferably the or each cam surface on the release member is provided with a bearing, and the or each cam surface of the latch member is provided with a recess shaped to co-operate in a friction fit with the corresponding bearing. The bearing may be a ball bearing or a strip bearing, and is preferably made of a bearing metal.

5

In an especially preferred embodiment, the release member comprises a substantially flat portion, and the cam surfaces are preferably provided on that flat portion, preferably on a lower edge of that flat portion.

10 The latch member of the locking mechanism is preferably at least partly contained within a dust collection module. The dust collection module is preferably hollow, and especially preferably cup shaped. Where the latch member is contained at least partly within the dust collection module, the said restriction of movement of the latch member relative to the dust collection module is preferably at least partly
15 achieved by the provision of inwardly directed flanges that project from an inwardly facing surface of the dust collection module. In an especially preferred embodiment the latch mechanism rests on the inside bottom surface of the dust collection module, and flanges directed inwardly from a side face of the dust collection module extend above the latch mechanism to restrict, and preferably substantially to prevent, upward
20 motion of the latch mechanism relative to the dust collection module.

The release member is preferably a separate part, and is preferably removable from the vacuum cleaner. In a preferred embodiment, in use, it is preferably contained within the dust bowl at least in part of its movement relative to the dust
25 bowl. Preferably a backing plate is also provided positioned so as to locate the release member between itself and the dust collection module. Preferably the backing plate is positioned so as to provide a channel in which the release member can slide.

The backing plate may itself be at least partly contained within the dust
30 collection module. In an especially preferred embodiment, the latch member is contained within the dust collection module adjacent one surface thereof, and part of the backing plate is positioned substantially to prevent movement of the latch member

further into the dust collection module. Preferably the latch member is adjacent the front or a side surface of the dust collection module and part of the backing plate is behind the latch member to hold it against the front or side surface.

5 Preferably the release member is positioned adjacent a surface, especially the front or side surface of the dust bowl, and the release member has a surface that preferably corresponds to at least part of an inwardly facing surface of the dust collection module, and preferably has a surface that corresponds in shape to at least part of the opposed surface of the backing plate.

10

Preferably, the dust collection module comprises an air inlet and the release member also acts as an air inlet closure member, and movement of the release member relative to the latch member also moves the release member relative to the dust collection module and acts simultaneously to close a first air flow path into the dust collection module and open a second air flow path, that is remote from the first air flow path, into the dust collection module.

15

In one embodiment, the dust collection module comprises two air inlets and the release member also acts as an air inlet closure shuttle member, whereby movement of the release member relative to the latch member causes the release member to slide relative to the dust collection module simultaneously to cover a first of the air inlets of the dust collection module and open a second of the air inlets of the dust collection module or vice versa.

20

In a specific design, the dust collection module comprises two air inlets and the release member is a shuttle member containing an opening, whereby movement of the release member relative to the latch member causes the release member to move relative to the said air inlets of the dust collection module so that in a first shuttle position the first, but not the second, air inlet of the dust collection module of the vacuum cleaner is in register with the shuttle opening, and in a second shuttle position the second, but not the first, air inlet of the dust collection module of the vacuum cleaner is in register with the or another shuttle opening. Most preferably the shuttle

25

30

member comprises first and second openings and the closure member can be moved relative to the said air inlets so that in a first shuttle position the first air inlet of the dust collection module of the vacuum cleaner is in register with the first shuttle opening but the second air inlet of the dust collection module is not in register with any shuttle opening, and in a second shuttle position the second air inlet of the dust collection module of the vacuum cleaner is in register with the second shuttle opening, but the first air inlet of the dust collection module is not in register with any shuttle opening.

10 Preferably the release member is in contact with a surface of the dust collection module. It preferably slides relative to the said surface. Also it preferably remains in contact with the said dust collection module surface throughout its movement relative thereto.

15 The present invention also provides a method of detachably securing a removable dust collection module to a vacuum cleaner housing, comprising:

- (i) providing a kit of parts according to the invention comprising a dust collection module and a locking mechanism according to the present invention;
- (ii) locating the dust collection module in a vacuum cleaner housing; and
- 20 (iii) moving the release member of the locking mechanism relative to the latch member of the locking mechanism to cause the latch member to move from a first position in which it engages part of the vacuum cleaner housing to a second position in which it is free from the vacuum cleaner housing.

25 Embodiments of the present invention will now be described, with reference to the accompanying drawings, wherein:

Figures 1A and 1B are perspective views of a vacuum cleaner according to the present invention showing the release shuttle member of the locking mechanism of the invention in lowered and raised position respectively;

30 Figure 2 is a perspective view of the latch member and release shuttle member forming the locking mechanism according to the present invention;

Figure 3 is a longitudinal sectional view through the vacuum cleaner of Figure 1A;

Figure 4 is a perspective view of the inner surface of the dust bowl of the vacuum cleaner of Figures 1A and 1B

5 Figure 5 is a cross-sectional view through the vacuum cleaner of Figure 1A, taken along the line V-V of Figure 1A, as viewed from the front of the vacuum cleaner;

Figure 6 is a cross-sectional view through the vacuum cleaner of Figure 1b, taken along the line VI-VI of Figure 1B, as viewed from the front of the vacuum
10 cleaner;

Figure 7 is an enlarged longitudinal sectional view through the dust bowl and shuttle member only of the vacuum cleaner of Figure 1; and

Figure 8 is an enlarged longitudinal sectional view through the dust bowl and shuttle member only of the vacuum cleaner of Figure 1;

15

Referring to the drawings, Figures 1A and 1B show a vacuum cleaner 1 comprising a main housing portion 3 containing a dust bowl 5. The dust bowl 5 is removable, and removal is effected by upward lifting by the user of integrally moulded handle 9. A shuttle member 7 is located within the dust bowl 5. It can be
20 raised and lowered relative to the dust bowl 5, and is shown in its lowered position in Figure 1A and in its raised position in Figure 1B. A latch member (not visible in Figure 1A and 1B) is contained within and retained in position relative to the dust bowl 5, and when the shuttle member 7 is in its raised position in Figure 1B, the latch member is moved to a position in which the dust bowl is locked in position relative to
25 the housing portion 3, i.e. it can not be removed from the housing portion 3, but when the shuttle member 7 is in its lowered position shown in Figure 1A the latching is de-activated and the dust bowl 5 is not locked in position relative to the housing portion 3, and therefore can be removed for emptying by the user by lifting handle 9. Thus the shuttle member 7 acts as a release member to activate and de-activate a latch
30 member. This is described in more detail below, particularly with reference to Figures 4 and 5. The latch member (not visible in Figure 1) and the shuttle member 7, which

is a release member for the latch, together provide the locking mechanism according to the present invention.

5 The shuttle member 7 also acts as an air flow path modifier. When the shuttle member 7 is shown in its lowered position in Figure 1A air flows through a floor inlet in the vacuum cleaner housing 3, and when the shuttle member is in its raised position in Figure 1B the floor inlet is closed, and air flows instead through upper inlet 49 (see Figure 1B), which is suitable for hose attachment. The action of the shuttle member to change the air flow path into the dust bowl 5 for floor or hose attachment use is
10 described in more detail below with reference to Figures 7 and 8.

Thus the shuttle member 7 has dual purpose, acting as part of a releasable locking mechanism to secure the dust bowl relative to the housing, and also as an air flow path modifier.

15 The vacuum cleaner 1 as shown in Figures 1A and 1B also includes a handle 11 detachably secured to the main housing portion 3 by depressible spring biased buttons 13 and 15 in a known manner. As shown the cleaner is suitable for hand-propelled use over a floor or surface. If desired the detachable handle 11 can be replaced by a
20 long handle to convert the vacuum cleaner to upright use.

The vacuum cleaner shown is powered by rechargeable batteries, and a rechargeable mount for electrical connection to a mains charging supply is provided under the removable cap 19, which may be a screw or push fit attachment. It is also
25 envisaged that the vacuum cleaner could be mains powered.

The vacuum cleaner housing portion 3 also contains side vents 45 for air outlet, as described in more detail with reference to Figure 3.

30 Housing and handle parts 3 and 11, dust bowl 5 and shuttle member 7 preferably each comprise moulded polymeric material.

Figure 2 shows in more detail the component parts of the locking mechanism according to the present invention. The locking mechanism basically comprises two component parts; a latch member 81, and a release member, which is the shuttle member 7 shown in Figure 1.

5

Considering first the latch member 81, this is an elongate member that comprises a central metal helical spring biasing portion 91 and two elongate end housing-engagement-portions 124 secured to the spring 91 at either end thereof. The spring is of uniform cross section and is located at either end around projecting stubs 10 125 on the inwardly facing ends 126 of each of the housing engagement portions 124. Each end housing-engagement portion 124 is a solid elongate part. It is substantially rectangular in cross-section. Each end housing engagement portion has a recessed portion 128 of smaller thickness part way along its length. Each recessed portion 128 is bounded by a first straight surface 130 extending substantially perpendicular to the 15 axis of the elongate latch member 81 on the outer side of the recessed portion 128, and a second sloping cam surface 89 on the inner side of the recessed portion 128. The second sloping cam surface 89 contains a channel shaped groove 134 part way along its surface, extending into the thickness of the end housing-engagement portions 124. The inwardly facing ends 126 of each of the end housing-engagement portions 20 124 comprise a flange 135 projecting to the side facing the shuttle member 7 as shown in Figure 2.

The spring 91 comprises a spring metal, and the end housing-engagement portions 124 are injection moulded and comprise a polymeric material.

25

Considering now the release member or shuttle member 7 also shown in Figure 2, this comprises a first lower, substantially flat portion 69 integrally moulded with a second upper block shaped portion 71. The uppermost surface of the shuttle member 7 is slightly curved to form the contoured outer surface of the vacuum cleaner.

30

The lower surface of the flat portion 69 of the shuttle release member 7 is provided with shaped end projecting portions 138. Each end projecting portion 138 is

formed with a side face that is an extension of the side face of the flat portion 69 of the shuttle member 7 and an inwardly facing cam surface 87. Each cam surface 87 is provided with a metallic ball bearing or strip bearing 88.

5 In operation the shuttle member 7 is pushed into the latch member 81 so that the end projecting portions 138 of the shuttle member 7 slide into the recessed portions 128 of the latch member 81. At this point the cam surfaces 87 of the shuttle member 7 slide relative to the cam surfaces 89 of the latch member, causing the spring 91 of the latch member 81 to compress, and the end housing engaging portions 124 of the
10 latch member 81 move towards each other. Lifting of the shuttle member relative to the latch causes the cam surfaces to separate, and the spring 91 expands causing the end housing-engagement portions 124 to move away from each other. These reversible movements of the latch member 81 can be used to disengage and engage a housing portion of the vacuum cleaner, as described in more detail below, especially
15 with reference to Figures 4 and 5.

Ball or strip bearings 88, which are metallic and positioned on the cam surfaces 87 of the shuttle member 7, engage the grooves 134 in the cam surfaces of the end housing-engagement portions of the latch member. This retains the parts together
20 against a small separating force, but can be overcome by applying a larger separating force. Bearings 88 on the cam surfaces 87 of the shuttle member are provided to form friction engagement between the cam surfaces 87 and 89, which must be overcome by the operator to lift the shuttle member 7.

25 The shuttle member 7 contains two air inlets; a first inlet in the form of a slot shaped aperture 47 in the first substantially flat portion 69 of the shuttle member 7, and a second air inlet in the form of a tubular inlet 49 of generally rectangular cross section through the block shaped portion 71 of the shuttle member. The purpose of these air inlets is to co-operate with inlets in the dust bowl 5 when required, in order
30 to modify the air flow path into the dust bowl 5. This is described in more detail below, especially with reference to Figures 7 and 8.

Figure 3 illustrates the manner in which the shuttle release member 7 and latch member 81 are located within the vacuum cleaner, and also illustrates the other operating parts of the vacuum cleaner.

5 From Figure 3 it can be seen that the main housing portion 3 of the vacuum cleaner comprises a motor 17 driving an impeller or fan 19 via a drive shaft 21. The motor is adjacent to and electrically connected to rechargeable batteries 23. Two are visible in the section of Figure 2, but there would usually be four or six batteries. The fan 19 is located in a fan chamber 25, that is located immediately behind the dust
10 collection bowl 5. Air vents 45 are provided on the side surfaces of the fan chamber 25 (see also Figure 1A and 1B).

The dust collection bowl 5 is generally cup shaped. It contains two air inlets 33, 35 in a common face, i.e. the front face, of the dust bowl 5. Shuttle release member 7
15 is located within the dust bowl 5, and lies against part of the inner surface of the front face of the dust bowl 5. A shuttle backing plate 53, which is also located within the dust bowl 5 and secured to the dust bowl 5 (securement not shown in Figure 2), sandwiches the shuttle member 7 between it and the inner surface of the front face of the dust bowl 5, thereby providing a channel within which the shuttle member 7 can
20 slide relative to the dust bowl 5. The rear face of the dust bowl 5 is covered by a filter member 37 and a back cover plate 39 spaced therefrom, and containing an air outlet 41. The bottom surface of the vacuum cleaner comprises an air inlet 43, which is in communication with the first air inlet 33 into the dust bowl 5.

25 Latch member 81 is contained within the dust bowl 5 and rests on the bottom surface of the dust bowl 5. It is shown end-on in Figure 3. Upward motion of the latch member 3 relative to the dust bowl 5 is substantially prevented by flanges 93 that project from the front face of the dust bowl into the dust bowl 5, just above the latch member 81. Similarly movement of the latch member 81 into the body of the
30 dust bowl (i.e. to the right in the orientation shown in Figure 3) is substantially prevented by a stepped portion 95 of the backing plate 53, which stepped portion 95 lies behind the latch member 81. Therefore the latch member 81 is substantially fixed

relative to the dust bowl in all directions other than into and out of the page. Movement into and out of the page is allowed, and indeed is used to engage and disengage the housing portion 3 of the vacuum cleaner, as described in more detail below, with reference to Figures 5 and 6 in particular.

5

Shuttle release member 7 and shuttle backing plate 53 each comprise two air inlets; shuttle member 7 comprising inlets 47 and 49, and shuttle backing plate 53 comprising inlets 59 and 61. In the position shown in Figure 3 air inlet 33 in the dust bowl 5 is in register with the air inlet 47 in shuttle member 7 and with air inlet 59 into the backing plate 53, but inlet 35 into dust bowl 5 is blocked by part of the shuttle member 7. Movement of the shuttle member relative to the dust bowl 5 and shuttle backing plate 53 can be carried out to alter the air flow path into the dust bowl 5, and this is described in more detail with reference to Figures 7 and 8.

15

In operation, in the shuttle position shown in Figure 3, the motor 17 drives fan 19 causing air and dust, dirt or debris to be sucked into the suction inlet 43 on the bottom surface of the vacuum cleaner. The air and entrained dust, dirt or debris travel via the inlet 43, through the first inlet 33 of the dust bowl, the aperture 47 in the shuttle 7, and the aperture 59 in the shuttle backing plate 53 and into the dust bowl 5. The large size of the receiving area of the dust bowl causes air velocity in the dust bowl to be smaller than at the entrance 33. This allows the entrained dirt, dust and debris to fall into the dust bowl 5. Air then travels through the filter 37 and the opening 41 in the back cover 39 of the dust bowl 5, and is pushed by the fan 19 out of the housing 3 via the vents 45 in the side surfaces of the housing.

25

The vacuum cleaner also has a front brush 65 which may be separately powered (not shown), and which is surrounded by housing portions so as to separate it from the front air inlet 43 into the vacuum cleaner, thereby ensuring that suction power is not reduced. Wheels 67 are also provided on the lower surface of the vacuum cleaner.

30

Figure 4 shows the inner surface of the dust bowl 5, and in particular shows the inwardly directed ridges 93 which are used to prevent upward movement of the latch

member 81 relative to the dust bowl 5. It can be seen that five separate parts form the inwardly directed flanges 93, and there are outer spaces 94 and inner spaces 96 between the five separate parts. The purpose of the outer spaces 94 is to allow for passage of projecting portions 138 on the lower surface of the release member 7 to pass through. The purpose of the inner spaces 96 is to allow passage of the projecting flange 135 on the end housing-engagement portions of the latch member 81. These spaces also limit inward and outward movement of the latch member 81. This is described in more detail with reference to Figures 5 and 6.

Figure 4 also illustrates bolts 79 projecting from the inner surface. These are used to engage the backing plate 53 to provide a channel between the dust bowl 5 and the backing plate 53 in which the release member can slide.

Figure 4 also illustrates two openings 33 and 35 for entry of air into the dust bowl 5, the first being in a first substantially flat faced portion 27 of the front face of the dust bowl, and the second being a recessed portion extending from the first portion 27 first to the front of the vacuum cleaner, and then rearwards in a curved shape (reference 29'') to form part of the upper surface of the vacuum cleaner (see also Figures 1A). Wheel recesses 80 in the body of the dust bowl 5, to accommodate the wheels 67 of the vacuum cleaner (Figure 3) are also shown.

Figures 5 and 6 show the operation of the elongate latch member 81 and release member 7 in more detail. These Figures are cross-sectional views of the vacuum cleaner, taken through the shuttle member 7, as viewed from the front of the vacuum cleaner, showing the shuttle in lowered (Figure 5) and raised (figure 6) position. As can be seen by comparison of Figures 7 and 8, when the shuttle member 7 is lowered the end housing engagement portions 124 of the latch member 81 of the spring biased latch member 81 are caused to move towards each other, (i.e. the elongate latch member shortens in length) by the action of co-operating cam surfaces 87 and 89 on the shuttle member 7 and latch member 81 respectively. Inward movement of the end housing-engagement portions 124 is limited by the inner flanges 135 on the end housing-engagement portions 124 which abut against the inner edge of the inner

spaces 96 between the separate parts of the inwardly directed flanges 93 from the dust bowl 5. The shortening in length of the latch member 81 acts against the biasing force of a spring member 91 forming the central part of the latch member 81.

5 When the shuttle member 7 is raised again (Figure 6), and the cam surfaces 87 and 89 are separated, the spring 91 acts to revert the latch member 81 to its previous longer length. In this case outward movement of the end housing-engagement portions 124 is limited by the inner flanges 135 on the end housing-engagement portions 124 which abut against the outer edge of the inner spaces 96 between the
10 separate parts of the inwardly directed flanges 93 projecting from the dust bowl 5. In this position the end housing-engagement portions 124 of the latch member 81 engage beneath retaining projections 85 on the main housing portion 3. Thus the latch member 81 moves from a first (unlocked) position in which it does not engage a retaining projection 85 on the main housing portion 3, to a second (locked) position
15 where it does engage the retaining projection 85 on the main housing portion 3. Thus by moving the shuttle release member from its lowered position (Figure 5) to its raised position (Figure 6) the latch member moves from an unlocked to a locked position. As already described, the latch member's movement relative to the dust bowl 5 is restricted by means of the bottom of the dust bowl 5, flanges 93 directed
20 inwardly from the front face of the dust bowl 5, and a back flange 95 forming part of the shuttle backing plate 53 (see Figure 3). Therefore by moving the shuttle 7 from its lowered position (Figure 5) to its raised position (Figure 6) the latch member 81 moves from a position in which the dust bowl is not locked in place relative to the housing portion 3 of the vacuum cleaner to a position in which it is locked in place
25 relative to the housing portion 3 of the vacuum cleaner.

 Figures 7 and 8 show in more detail the features of the dust bowl 5, the shuttle member 7 and the backing plate 53 that can co-operate together to cause a change in the air flow path into the dust bowl 5 of the vacuum cleaner. In essence this is
30 achieved by movement of the shuttle member 7 relative to the dust bowl 5. For simplicity Figures 7 and 8 show only the dust bowl 5, shuttle member 7 and backing

plate 53 and do not show the filter 39 or back cover plate 41 of the dust bowl 7 or other features of the vacuum cleaner.

As can be seen in Figures 7 and 8 dust bowl 5 has a front face (facing into the page in Figure 5) that comprises a first substantially flat faced portion 27 that extends substantially vertically upwards from the lower surface of the main housing portion 3, and a second recessed portion 29 extending from the first portion 27 first to the front of the vacuum cleaner (reference 29'), and then rearwards in a curved shape (reference 29'') to form part of the upper surface of the vacuum cleaner (see also Figures 1A). The front face 27, 29 of the dust bowl contains two apertures for air; a first aperture 33 which is in the first flat faced portion 27 of the front face of the dust bowl, and a second inlet 35 which is in the second recessed portion 29'' of the front face of the dust bowl 5.

As already described with reference to Figure 2, the shuttle member 7 comprises a first lower, substantially flat portion 69 integrally moulded with a second upper block shaped portion 71. In common with the dust bowl 5, the shuttle member 7 also contains two air inlets; a first inlet in the form of a slot shaped aperture 47 in the first substantially flat portion 69 of the shuttle member 7, and a second air inlet in the form of a tubular inlet 49 of generally rectangular cross section through the block shaped portion 71 of the shuttle member.

Backing plate 53 comprises a stepped backing surface, comprising first and second substantially flat portions 73, 75 extending substantially parallel to each other and to the first portions 27 and 69 of the dust bowl 5 and shuttle member 7 respectively, and a stepped portion 77 connecting the first and second portions 73, 75 of the backing plate 53. The backing plate 53 comprises two apertures 59, 61 in the first and second portions 73, 75 respectively. Backing plate 53 is secured to the inner surface of the dust bowl 5 by means of attachment nuts which secure to moulded bolts 79 (referred to previously in the description of Figure 4) projecting inwardly of the dust bowl 5. The arrangement is such that the aperture 33 in the dust bowl 5 is always

in register with the aperture 59 in the backing plate 53, and such that the inlet 35 in the dust bowl 5 is always in register with the aperture 61 in the backing plate 53.

5 The operation of the shuttle member to alter the air flow through the vacuum cleaner is now described. In Figure 7 the shuttle member 7 is shown in its lowered position, for floor cleaning, and in Figure 8 the shuttle member 7 is shown in raised position for hose attachment.

10 In the position shown in Figure 7, air inlet 33 into the dust bowl 5 (and hence also the aperture 59 in the backing plate) is in register with aperture 47 of the shuttle 7, but the air inlet 35 into the dust bowl (and also the aperture 61 through the backing plate 53) is covered and blocked by part of the shuttle member 7. Hence referring also to Figure 3 operation of the motor and fan causes air to be drawn through the in register apertures into the dust bowl, i.e. through the floor inlet 43.

15

In contrast, in the position shown in Figure 8, air inlet 35 into the dust bowl 5 (and hence also the aperture 61 into the backing plate 53 is in register with the tubular inlet 49 through the shuttle member 7, but the air inlet 33 into the dust bowl (and also the aperture 59 into the backing plate 53) are covered by part of the flat surface 27 of the shuttle member 7. Thus in this case operation of the motor and fan causes air to be drawn through the in-register inlets, i.e. through the aperture 49 on the upper surface of the vacuum cleaner. A hose attachment may be connected in this position to the tubular inlet 49 of the shuttle member 7 for off the floor use of the vacuum cleaner. It will be appreciated that the fact that only one air flow path is open at any one time ensures that suction power of the vacuum cleaner is not diminished in either position.

20 It will be noted that in the raised position of the shuttle for hose attachment (Figures 6 and 8) the dust bowl 5 is locked in position relative to the vacuum cleaner housing, by the latch member 81. Therefore there is no risk of the dust bowl being lifted accidentally during the hose attachment process.

30

The operation of the shuttle member to alter the air flow path into the vacuum cleaner forms the subject of contemporaneously filed British Patent Application titled "Airflow Modification in Vacuum Cleaners" (sharing filing date of this Application, [number to be supplied when issued]), by common applicant, the entire disclosure of which is incorporated herein by reference.

Thus a simple design is provided whereby the shuttle release member 7 acts not only detachably to retain the dust bowl relative to the housing portion 3, but also as a means of changing the air flow path into and through the vacuum cleaner from one where suction is from a floor directed inlet to one where suction is through a hose attachment inlet on an upper surface of the vacuum cleaner, and the arrangement is such that dust bowl removal does not accidentally occur when the shuttle member is raised for hose attachment.

CLAIMS

1. A locking mechanism for detachably securing a removable dust collection module to a vacuum cleaner housing comprising:
 - (i) a latch member that can move from a first position in which, in use, it can engage part of the vacuum cleaner housing to a second position in which, in use, it is free from the vacuum cleaner housing; and
 - (ii) a release member that is movable, in use, relative to the latch member, the movement causing the latch member to move from its first to second position.
2. A locking mechanism according to claim 1, wherein the latch member is an elongate member.
3. A locking mechanism according to claim 2, wherein the elongate latch member comprises a resilient biasing portion that provides a biasing force.
4. A locking mechanism according to claim 3, wherein the latch member also comprises two end housing-engagement portions.
5. A locking mechanism according to claim 4, wherein the end housing-engagement portions are urged away from each other by the biasing force of the resilient portion.
6. A locking mechanism according to claim 3, 4 or 5 wherein the release member can be moved relative to the latch member to provide a force acting against the biasing force of the biasing portion of the latch member.
7. A locking mechanism according to any of claims 1 to 6, wherein the release member is moveable, in use, from a first release-member-position in which it is in contact with the latch member, to a second release-member-position in which it is not in contact the latch member.

8. A locking mechanism according to claim 7, wherein the release member is movable relative to the latch member such that when the release member is in the said first release-member-position where it is in contact with the latch member then the latch member is in its second position in which it is free from the housing part.
- 5 9. A locking mechanism according to any of claims 1 to 8, wherein the release member is provided with at least one cam surface.
- 10 10. A locking mechanism according to claim 9 wherein the latch member is provided with a corresponding cam surface
11. A locking mechanism according to claim 9 or 10 wherein the cam surfaces can slide over each other to effect the said movement of the latch member from its first to second position.
- 15 12. A locking mechanism according to any of claims 9 to 11, wherein the release member comprises two cam surfaces, and the latch member comprises two end, housing-engagement portions, each of which is provided with a cam surface shaped to correspond with respective ones of the cam surfaces on the release member.
- 20 13. A locking mechanism according to any of claims 9 to 12, wherein the or each cam surface on the release member is provided with a bearing, and the or each cam surface of the latch member is provide with a recess shaped to co-operate in a friction fit with the corresponding bearing.
- 25 14. A locking mechanism according to any preceding claim, wherein the release member comprises a substantially flat portion.
- 30 15. A kit of parts comprising a locking mechanism according to any preceding claim in combination with a removable dust collection module of a vacuum cleaner, the latch member being retained to the dust collection module so that movement of

the latch member relative to the dust collection module in at least one direction is restricted, and preferably substantially prevented.

16. A kit of parts according to claim 15, wherein the latch member of the locking
5 mechanism is at least partly contained within the dust collection module.

17. A kit of parts according to claim 16, wherein the said restriction of movement
of the latch member relative to the dust collection module is effected by one or more
inwardly directed flanges that project from an inwardly facing surface of the dust
10 collection module.

18. A kit of parts according to any of claims 15 to 17, wherein the release member
is a separate part, and is preferably removable, in use, from the vacuum cleaner.

19. A kit of parts according to any of claims 15 to 18, wherein the release member
is at least partly contained within the dust bowl.

20. A kit of parts according to any of claims 15 to 19, also comprising a backing
plate positioned so as to locate the release member between itself and the dust
20 collection module.

21. A kit of parts according to claim 20, wherein the backing plate is positioned so
as to provide a channel in which the release member can slide.

22. A kit of parts according to claim 20 or 21, wherein the backing plate is at least
25 partly contained within the dust collection module.

23. A kit of parts according to any of claims 20 to 22, wherein the latch member is
contained within the dust collection module adjacent one surface thereof, and part of
the backing plate is positioned substantially to prevent movement of the latch member
30 further into the dust collection module.

24. A kit of parts according to any of claims 15 to 23, wherein the latch member is an elongate member, and the release member is contained within the dust collection module so that it can move relative thereto in a direction that is substantially perpendicular to the said elongate latch member.

5

25. A kit of parts according to any of claims 15 to 24, wherein the dust collection module comprises an air inlet and the release member also acts as an air inlet closure member, and movement of the release member relative to the latch member also moves the release member relative to the dust collection module and acts
10 simultaneously to close a first air flow path into the dust collection module and open a second air flow path, that is remote from the first air flow path, into the dust collection module.

26. A kit of parts according to any of claims 15 to 25, wherein the dust collection
15 module comprises two air inlets and the release member also acts as an air inlet closure shuttle member, whereby movement of the release member relative to the latch member causes the release member to slide relative to the dust collection module simultaneously to cover a first of the air inlets of the dust collection module and open a second of the air inlets of the dust collection module or vice versa.

20

27. A kit of parts according to any of claims 15 to 25, wherein the dust collection module comprises two air inlets and the release member is a shuttle member containing an opening, whereby movement of the release member relative to the latch member causes the release member to move relative to the said air inlets of the dust
25 collection module so that in a first shuttle position the first, but not the second, air inlet of the dust collection module is in register with the shuttle opening, and in a second shuttle position the second, but not the first, air inlet of the dust collection module is in register with the or another shuttle opening.

30 28. A kit of parts according to claim 27, wherein the shuttle member comprises first and second openings and the closure member can be moved relative to the said air inlets so that in a first shuttle position the first air inlet of the dust collection

module is in register with the first shuttle opening but the second air inlet of the dust collection module is not in register with any shuttle opening, and in a second shuttle position the second air inlet of the dust collection module is in register with the second shuttle opening, but the first air inlet of the dust collection module is not in register with any shuttle opening.

29. A vacuum cleaner housing containing the removable dust collection module and locking mechanism combination of any of claims 15 to 28, the dust collection module being removable by extraction from the vacuum cleaner housing in a first direction, and the restricted direction of movement of the locking mechanism relative to the dust collection module also being in the said first direction.

30. A method of detachably securing a removable dust collection module to a vacuum cleaner housing, comprising:

(i) providing a kit of parts according to any of claims 15 to 28, comprising a dust collection module and a locking mechanism according to any of claims 1 to 14;



(ii) locating the dust collection module in a vacuum cleaner housing; and

(ii) moving the release member of the locking mechanism relative to the latch member of the locking mechanism to cause the latch member to move from a first position in which it engages part of the vacuum cleaner housing to a second position in which it is free from the vacuum cleaner housing.

31. A locking mechanism, kit of part, vacuum cleaner housing or method of detachably securing a removable dust collection module to a vacuum cleaner housing substantially as hereinbefore described with reference to the accompanying drawings.


THIS PAGE BLANK (USPTO)

1/8

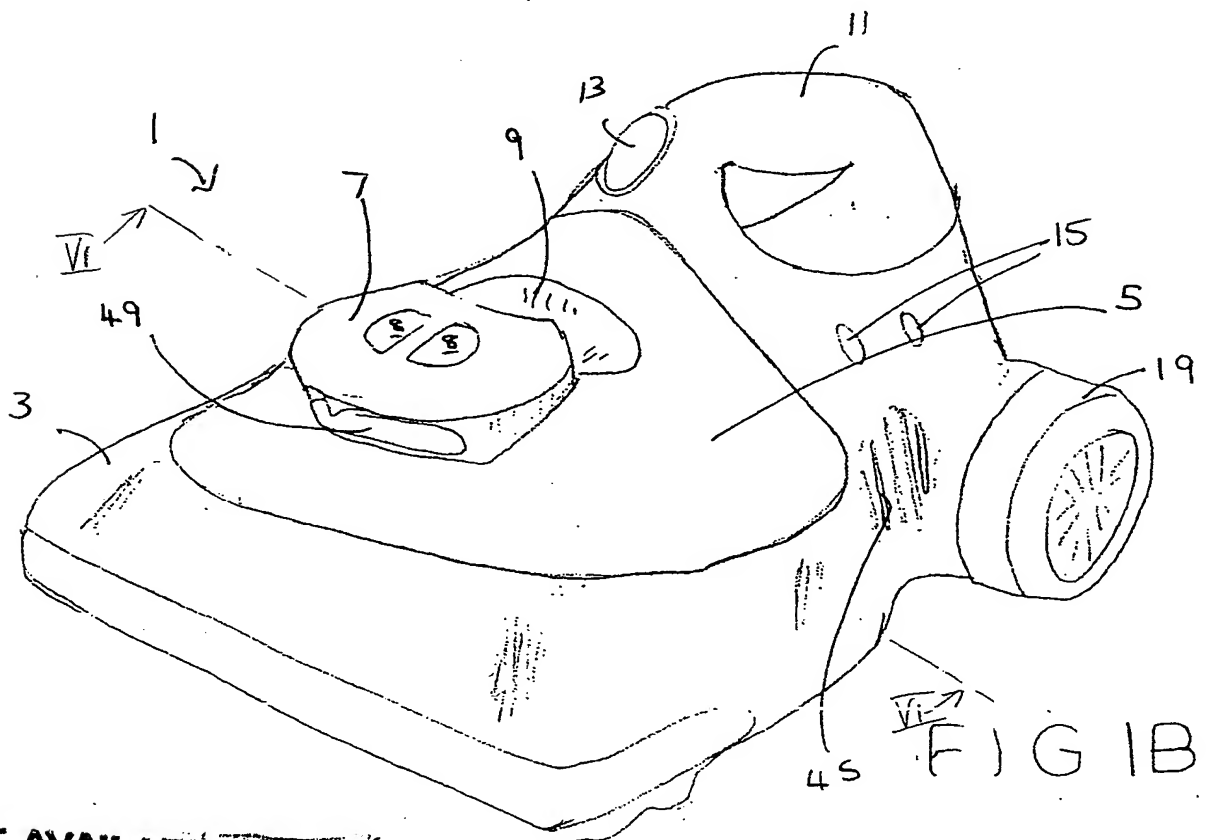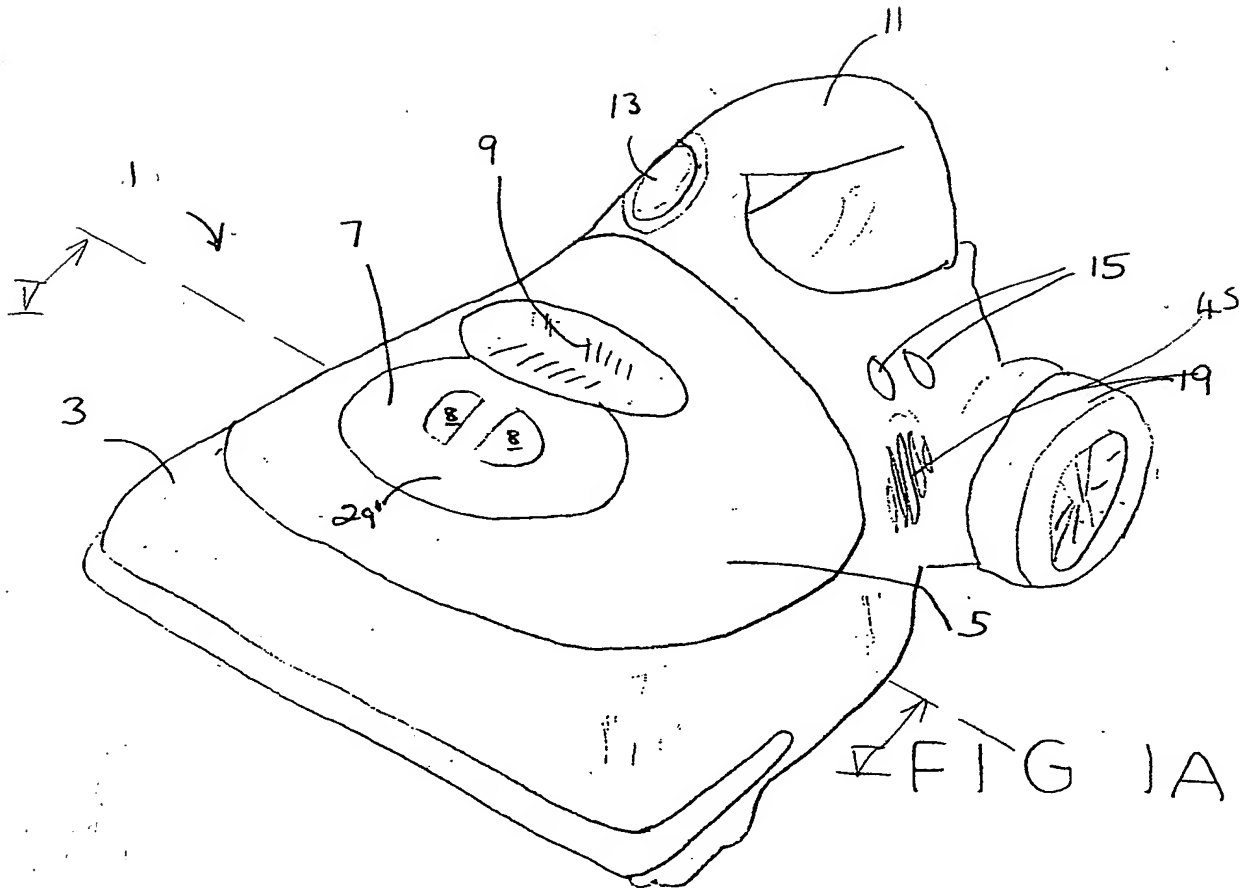

THIS PAGE BLANK (USPTO)


257

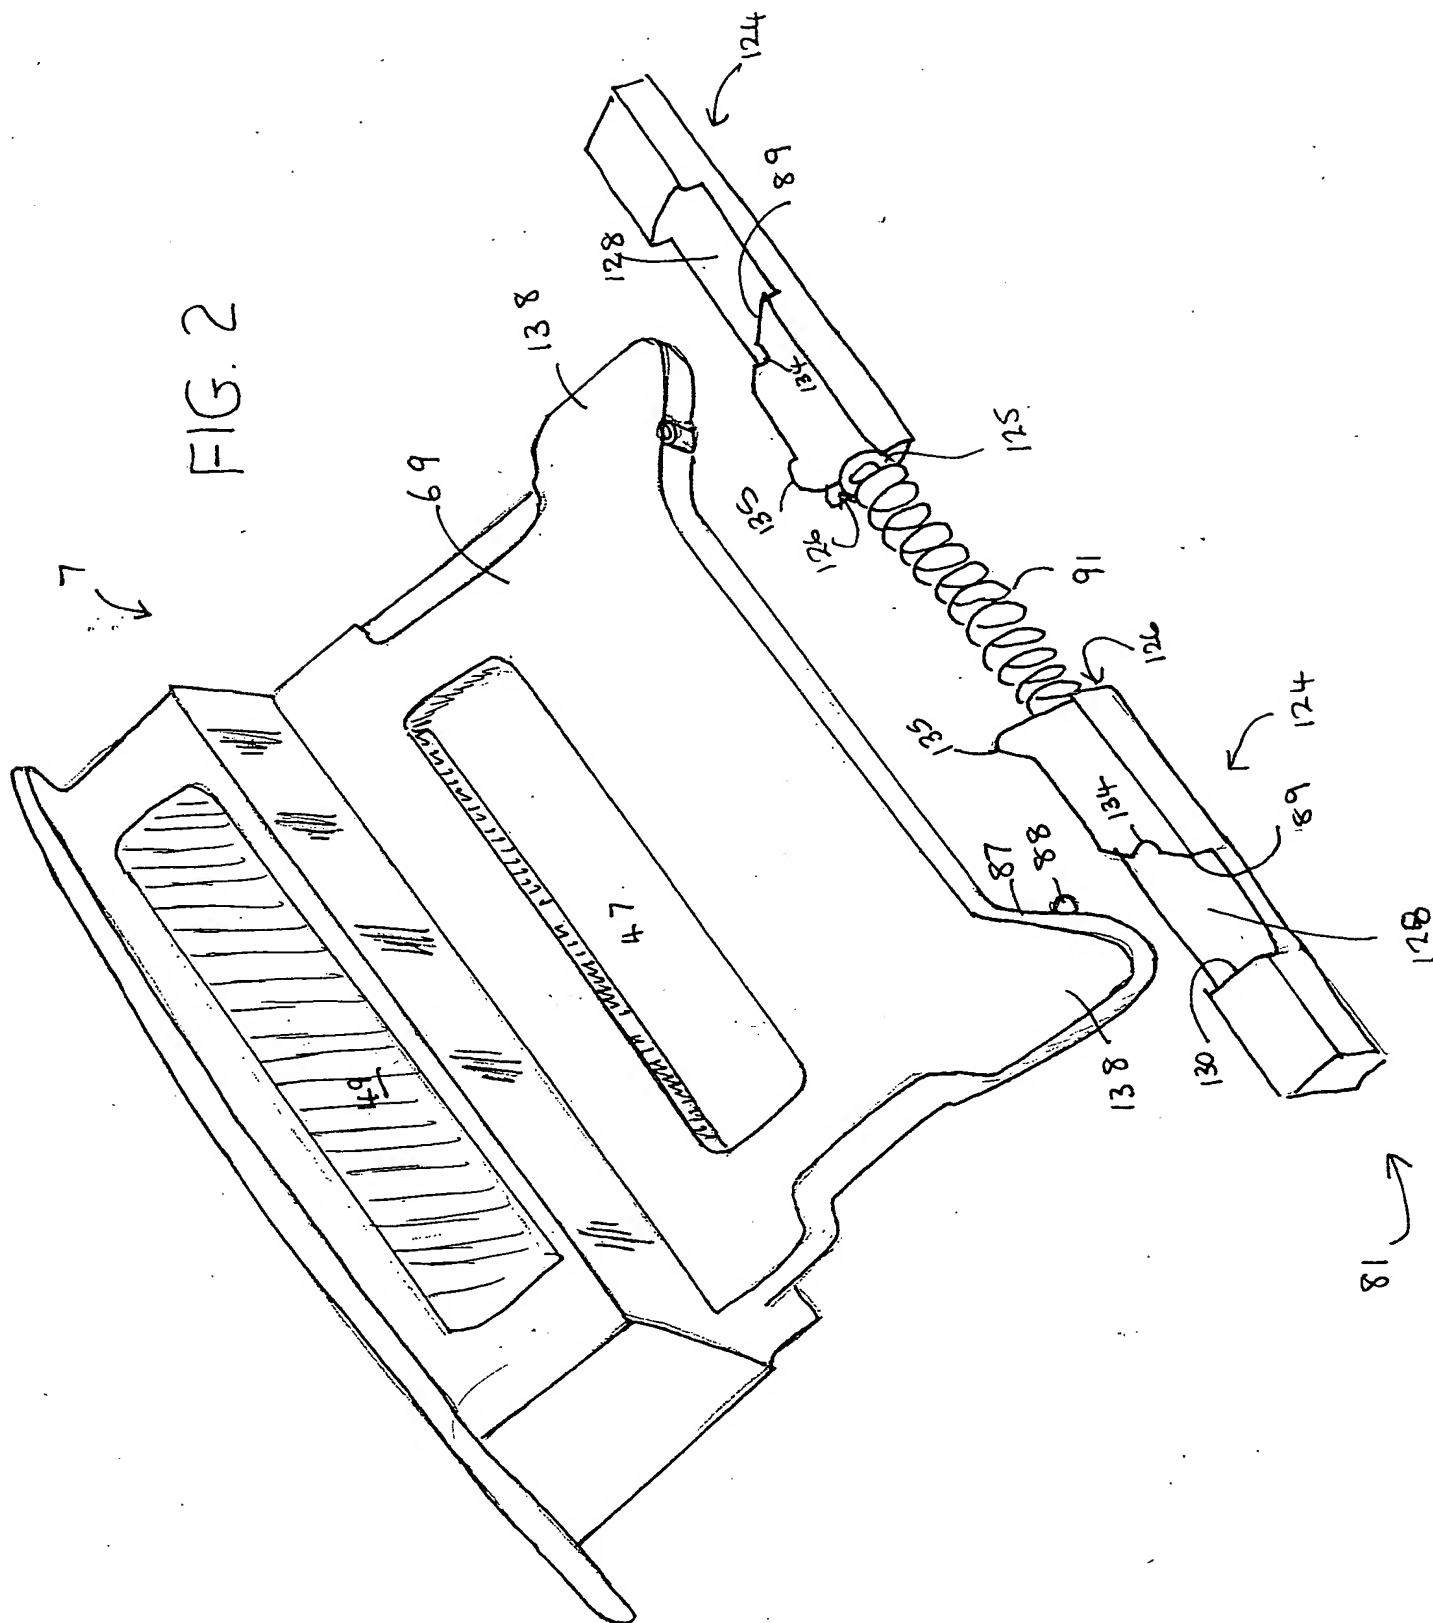

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)


FIG. 3

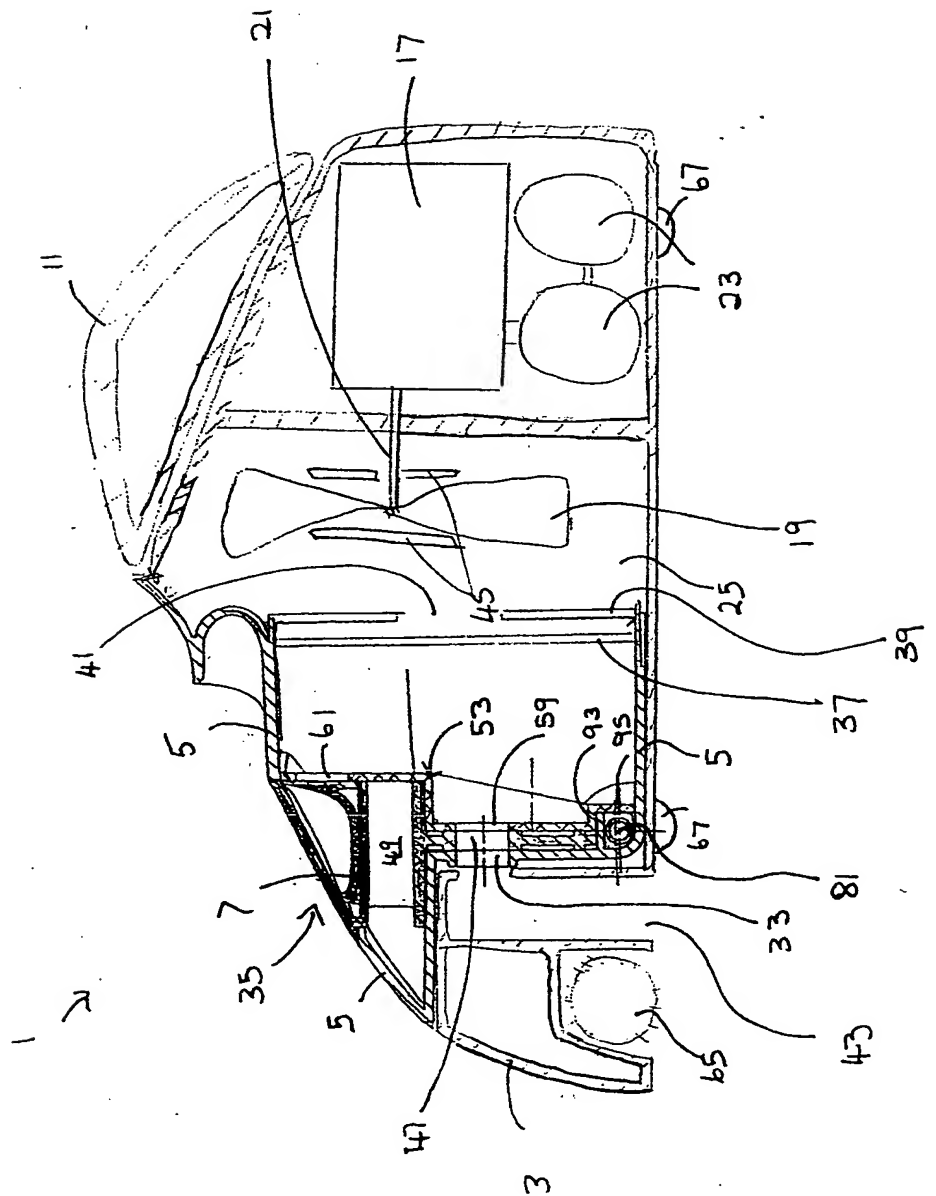

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

FIG. 4

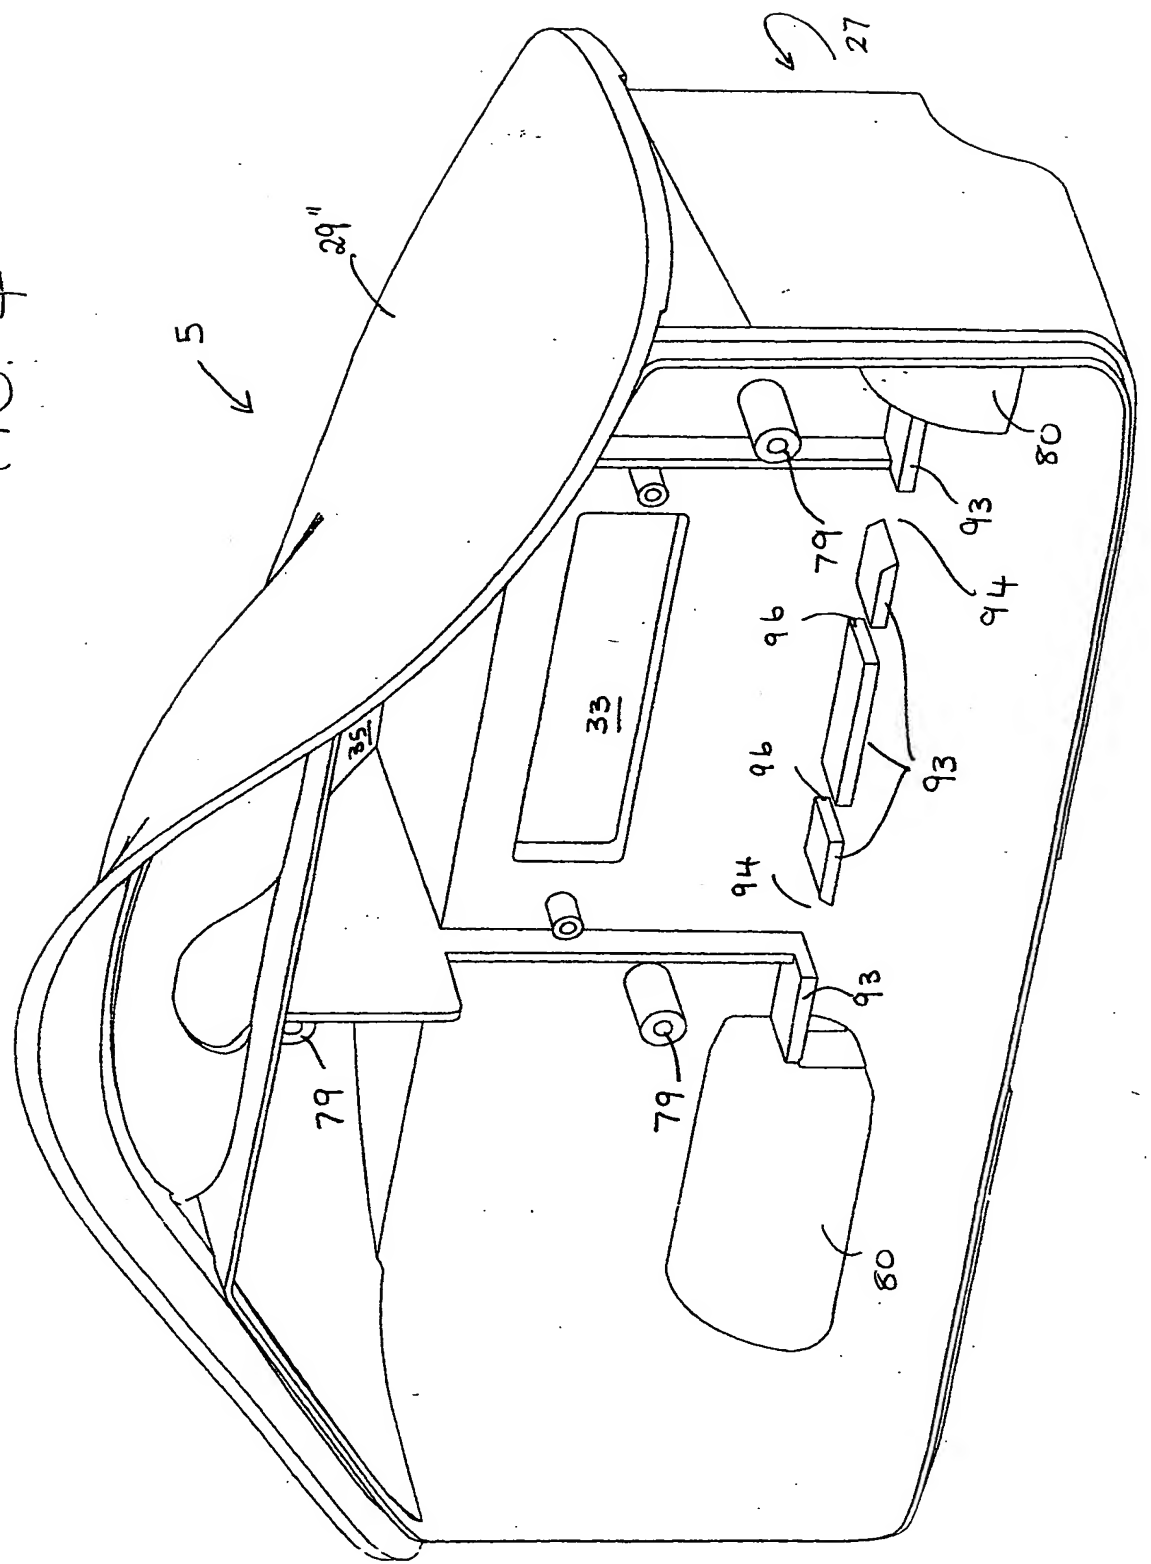

THIS PAGE BLANK (USPTO)

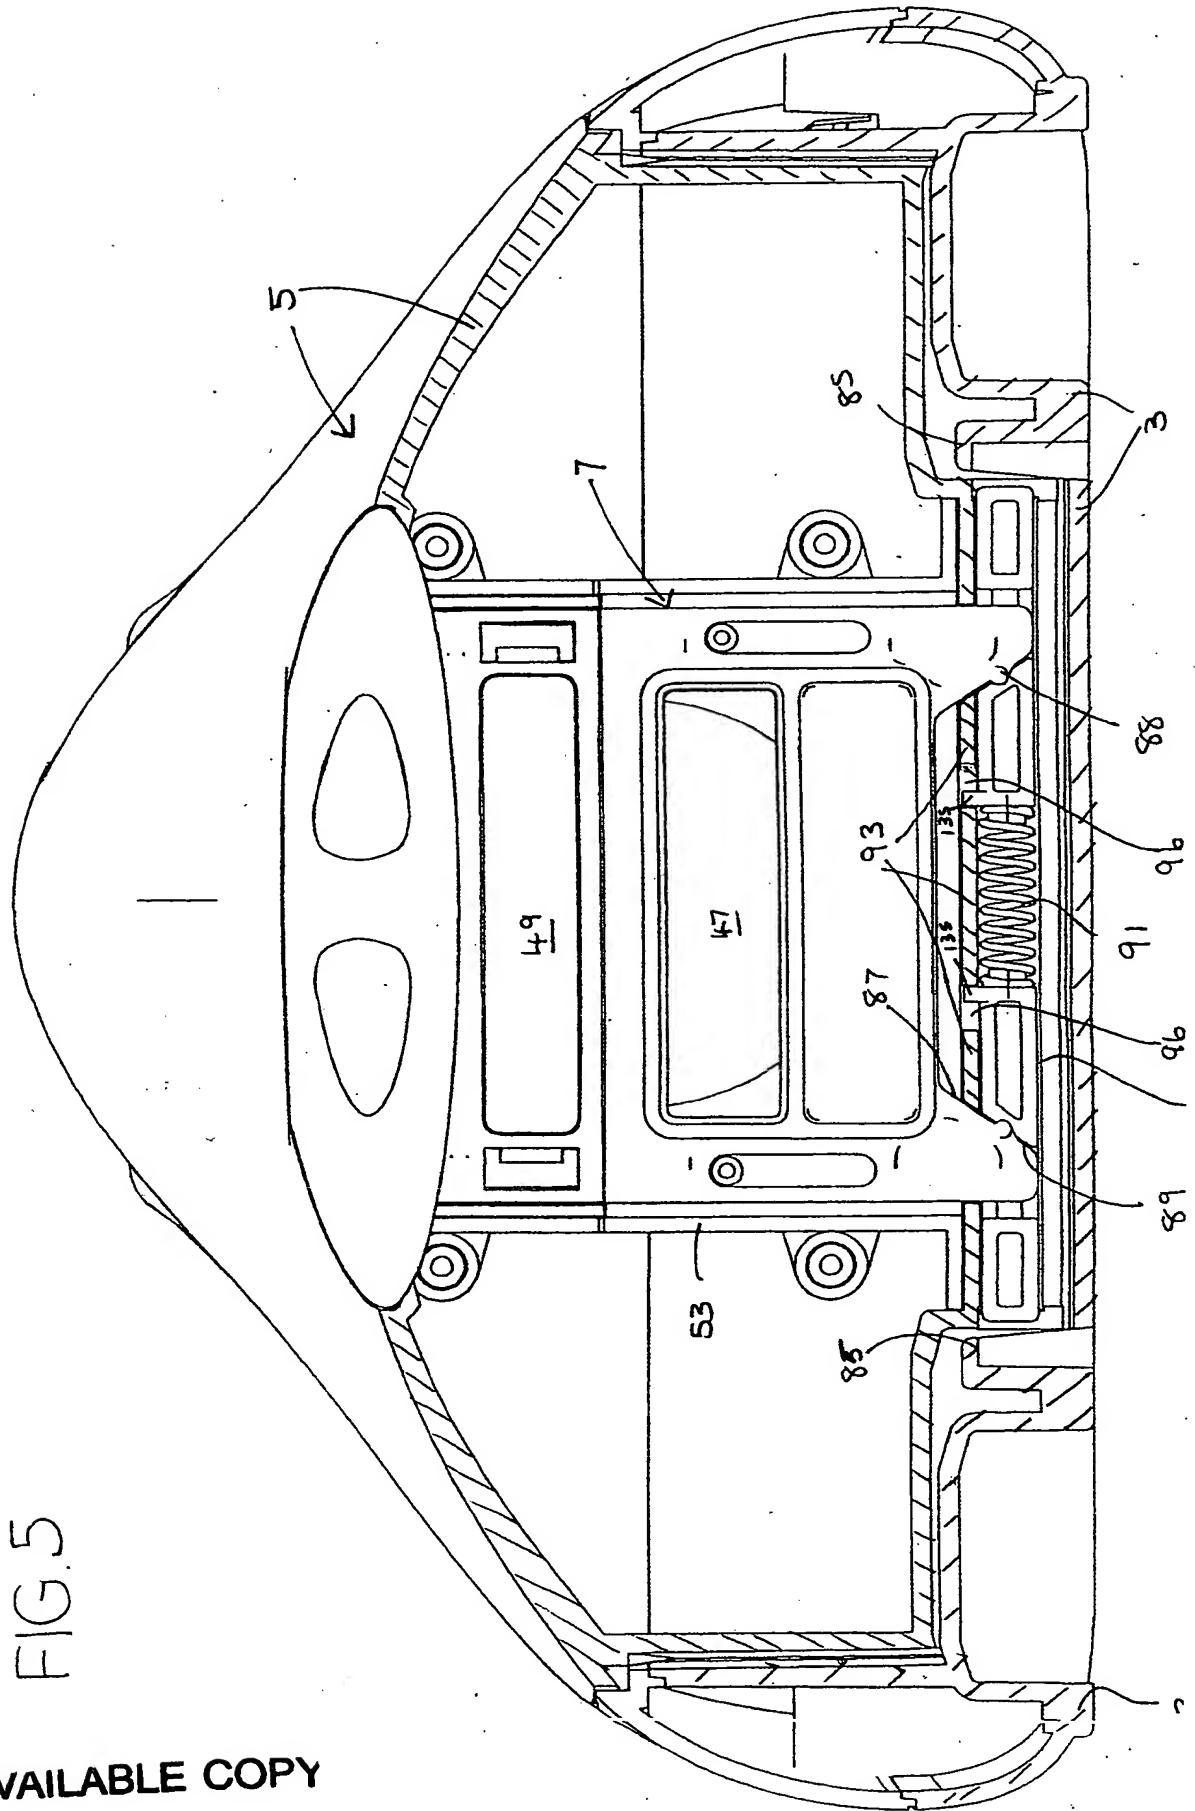


FIG. 5

THIS PAGE BLANK (USPTO)


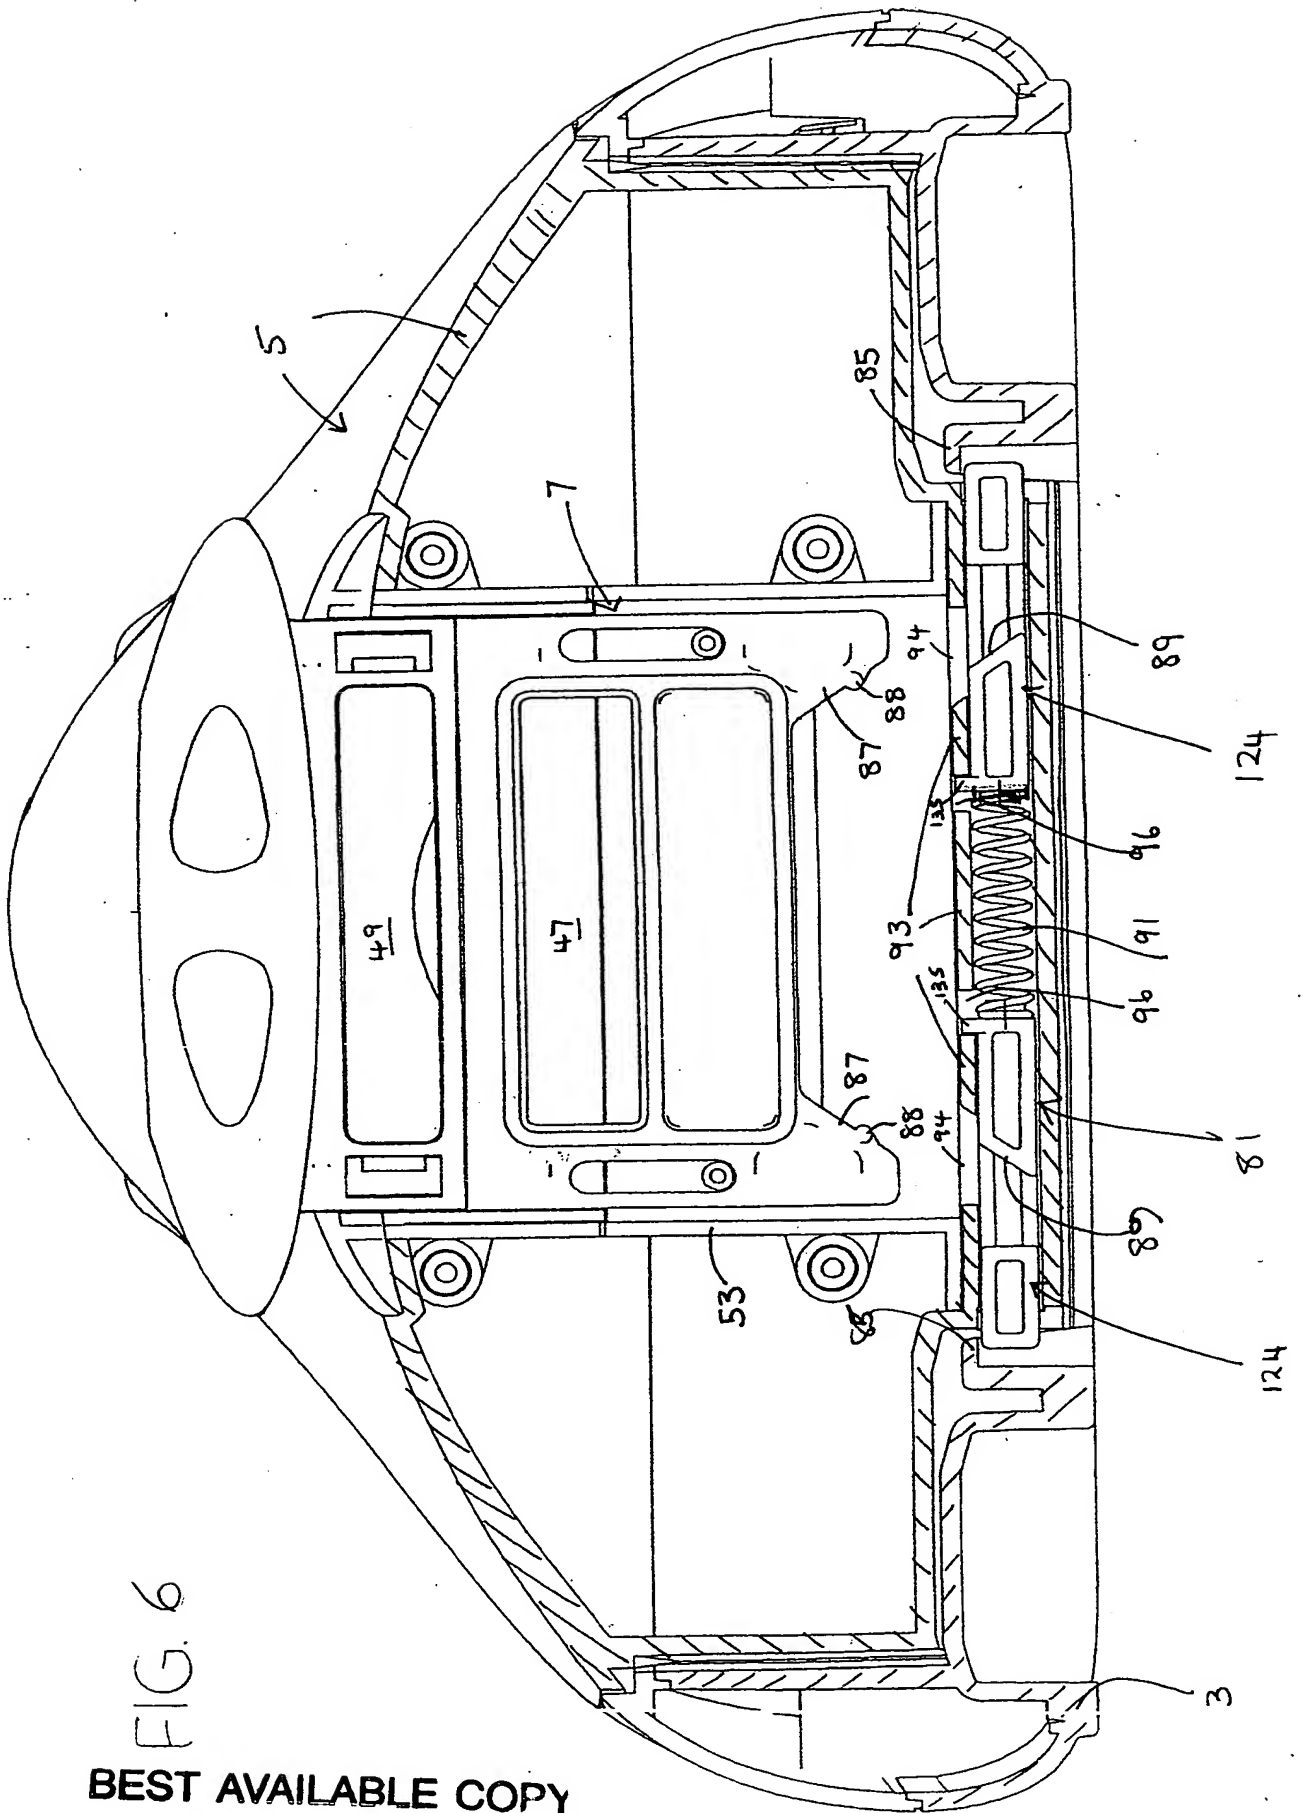


FIG. 6
BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

FIG. 7

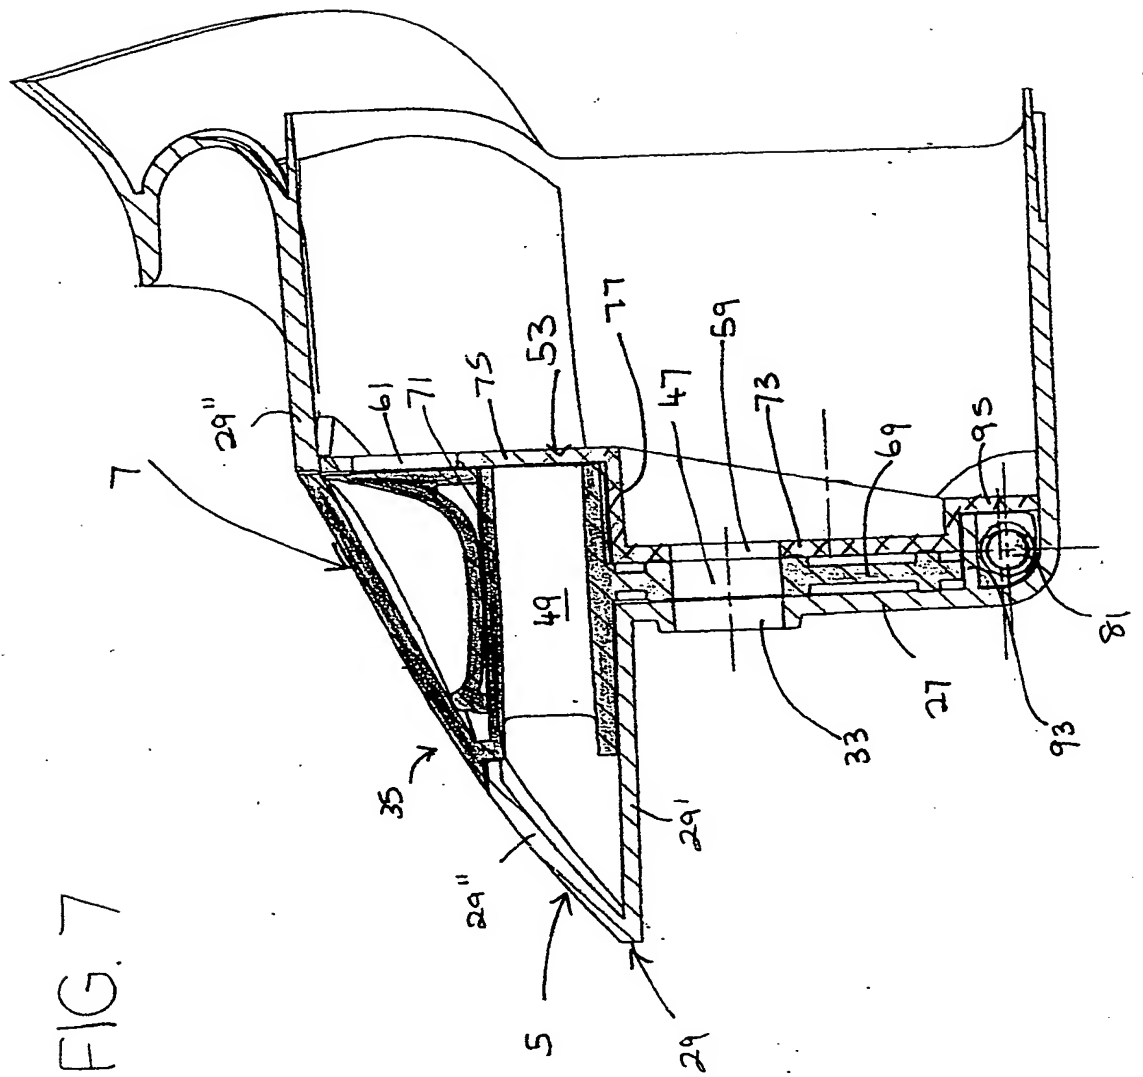

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

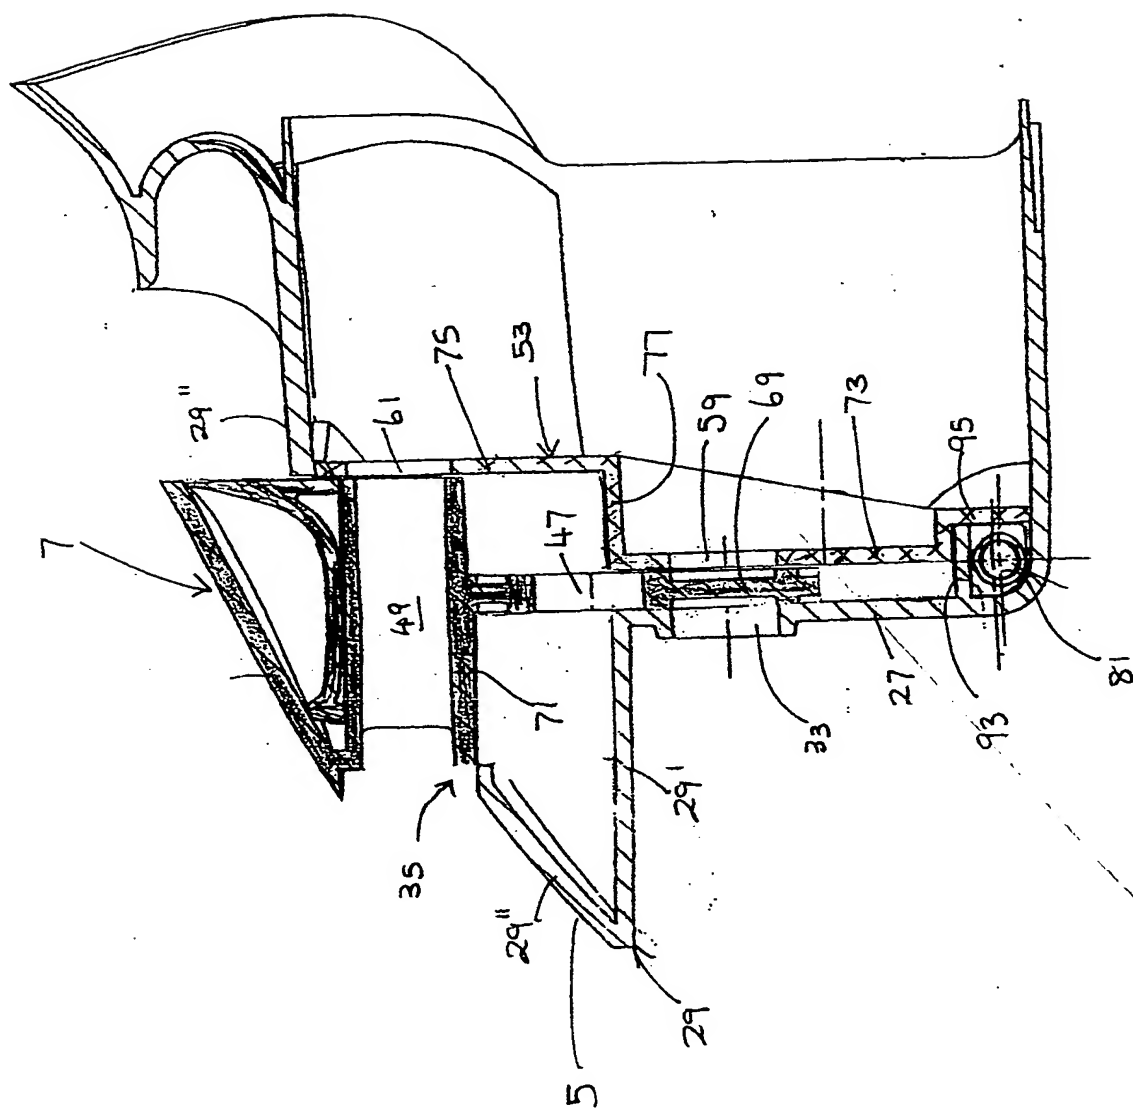


FIG. 8

THIS PAGE BLANK (USPTO)